


LTB731

Pendent Mounting Bracket for Mini Dome Cameras

Features:

- Aluminum alloy with surface treatment
- Waterproof rubber suited for indoor/outdoor applications
- The internal wiring improves appearance
- Outlet hole retained for convenient wiring indoors
- Superior waterproof design

Dimensions:

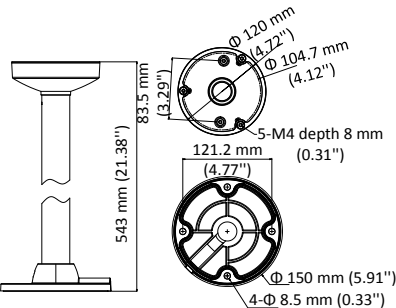

Parameters:

Range of Application	Suitable for dome camera pendent mounting
Materials	Aluminum Alloy
Dimensions	$\Phi 5.91 \times 21.38"$ ($\Phi 150 \times 543$ mm)
Weight	2.84 lb (1,290 g)

Notice:

- This bracket should be installed on a flat wall
- Waterproof rubber is necessary for outdoor applications
- The wall should be capable of supporting over 3 times the total weight of the camera plus the mount.
- Maximum load capacity of the bracket is 6.6 lbs (3 kg).

Installation:

- ① Choose an appropriate wall to install the ceiling plate
- ② Connect suspender and adapter; thread the cable and screw in place
- ③ Screw in and affix the adapter to the pole
- ④ Remove the lower dome and align holes with adapter plate
- ⑤ Install adapter to bracket and screw in place
- ⑥ Connect cable and affix camera onto the adapter plate
- ⑦ Modify camera angle, install the lower dome and screw in place
- ⑧ Installation is now complete.

Note: The actual bracket may vary from the picture above.